



Multi-model assessment of heat decarbonisation options in the UK using electricity and hydrogen



Marko Aunedi ^{a,*}, Maria Yliruka ^{a,1}, Shahab Dehghan ^{a,1}, Antonio Marco Pantaleo ^{a,b}, Nilay Shah ^a, Goran Strbac ^a

^a Imperial College London, South Kensington Campus, London, SW7 2AZ, UK

^b University of Bari Aldo Moro, Piazza Umberto I 1, Bari, 70121, Italy

ARTICLE INFO

Article history:

Received 5 January 2022

Received in revised form

4 May 2022

Accepted 28 May 2022

Available online 2 June 2022

Keywords:

Heat Decarbonisation

Hydrogen

Renewable energy

Heat pumps

Hydrogen storage

Multi-model assessment

ABSTRACT

Delivering low-carbon heat will require the substitution of natural gas with low-carbon alternatives such as electricity and hydrogen. The objective of this paper is to develop a method to soft-link two advanced, investment-optimising energy system models, RTN (Resource-Technology Network) and WeSIM (Whole-electricity System Investment Model), in order to assess cost-efficient heat decarbonisation pathways for the UK while utilising the respective strengths of the two models. The linking procedure included passing on hourly electricity prices from WeSIM as input to RTN, and returning capacities and locations of hydrogen generation and shares of electricity and hydrogen in heat supply from RTN to WeSIM. The outputs demonstrate that soft-linking can improve the quality of the solution, while providing useful insights into the cost-efficient pathways for zero-carbon heating. Quantitative results point to the cost-effectiveness of using a mix of electricity and hydrogen technologies for delivering zero-carbon heat, also demonstrating a high level of interaction between electricity and hydrogen infrastructure in a zero-carbon system. Hydrogen from gas reforming with carbon capture and storage can play a significant role in the medium term, while remaining a cost-efficient option for supplying peak heat demand in the longer term, with the bulk of heat demand being supplied by electric heat pumps.

© 2022 The Authors. Published by Elsevier Ltd. This is an open access article under the CC BY license (<http://creativecommons.org/licenses/by/4.0/>).

1. Introduction

This section outlines the motivation and background for the analysis presented in the paper, describing the review of the relevant literature. It also highlights the key contributions of the paper and lays out its structure.

1.1. Motivation and background

A wide-ranging transformation is required in energy systems around the world over the next three decades to meet the ambitious targets set for decarbonisation [1,2]. In 2019, the United Kingdom became the first major economy in the world to adopt a law aimed at bringing the greenhouse gas emissions to net-zero by 2050 [3]. The UK's heat sector, predominantly supplied by natural

gas at present, accounts for a third of the total carbon emissions [4,5].

Likely pathways for decarbonising heat, as the most challenging energy sector to meet the net-zero target, will involve substituting fossil fuels with low-carbon energy vectors, electricity and hydrogen, produced from renewable or other forms of zero-carbon energy [6]. Renewable energy systems have recently experienced significant progress with respect to technological development, resource assessment, cost reduction and system design [7]. Specific recent advances in RES reported in the literature include hybridisation and cross-sector integration [8] as well as building-integrated systems and novel resource assessment approaches [9].

The UK Government's Net Zero Strategy [10] set the ambition that by 2035 all new heating appliances installed in homes and workplaces will be low-carbon technologies, like electric heat pumps (HPs) or hydrogen boilers. At the same time, the Strategy also envisages a full decarbonisation of electricity supply by 2035 and 5 GW of low-carbon hydrogen production capacity by 2030.

At present, only about 1% of the UK's 28 million homes are heated by HPs. The UK Government's Ten Point Plan for Green

* Corresponding author.

E-mail address: m.aunedi@imperial.ac.uk (M. Aunedi).

¹ Marko Aunedi, Maria Yliruka, and Shahab Dehghan contributed equally to this work.

List of abbreviations

ASHP	Air Source Heat Pump	LOLE	Loss of Load Expectation
ATR	Autothermal Reformer	LP	Linear Programming
CCGT	Combined-Cycle Gas Turbine	MILP	Mixed-Integer Linear Programming
CCS	Carbon Capture and Storage	NPV	Net Present Value
COP	Coefficient of Performance	OCGT	Open-Cycle Gas Turbine
DHN	District Heat Network	PV	Photovoltaics
DSR	Demand-Side Response	PEM	Proton-Exchange Membrane
FES	Future Energy Scenarios	RES	Renewable Energy Sources
GB	Great Britain	RTN	Resource-Technology Network
GHR	Gas-Heated Reformer	SMR	Steam Methane Reformer
HP	Heat Pump	SOE	Solid Oxide Electrolyser
		UK	United Kingdom
		WeSIM	Whole-electricity System Investment Model

Industrial Revolution [11] set the objective of installing 600,000 HPs per year in the period 2021–2028. Long-term projections for the UK energy system generally envisage a very high future penetration of HP systems; for instance, one of National Grid's Future Energy Scenarios (FES) [12] (Consumer Transformation) projects up to 26.2 million HP systems (including hybrids) in the UK by 2050, which is equivalent to almost every household in the UK having a HP system installed.

Achieving the UK's long-term climate targets cost-effectively requires a coordinated approach to decarbonising both heat and electricity supply [13,14]. Previous research has demonstrated that heating and electricity systems can benefit significantly from mutual synergies on their pathways towards decarbonisation, by unlocking opportunities for cross-vector flexibility to support the integration of low-carbon generation technologies and to significantly reduce the cost of decarbonisation [15–22]. In other words, integrated and coordinated design of heat and electricity supply systems is likely to result in a lower low-carbon transition cost compared to a “silo” approach optimising each supply system in a decoupled fashion.

It has been shown that a cost-efficient decarbonisation of energy supply through large volumes of variable renewables requires a variety of technologies to provide flexibility in the context of grid support, balancing, and adequacy or security of supply [23], aimed at continuous production and consumption balance within the whole energy system. These technologies include various forms of energy storage, demand-side response, expansion of interconnection capacity and more flexible generation technologies, as well as a number of cross-vector flexibility or sector coupling options, such as hydrogen production and conversion technologies [24–26].

Many previous studies have highlighted the critical role of flexibility, particularly in low-inertia power systems with very high penetrations of renewable energy resources with the objective to achieve net zero or even net negative carbon emission targets [25,27,28].

The cost-effectiveness of hydrogen as a flexible intermediate energy vector in a highly renewable energy system has been previously demonstrated in Ref. [29], which estimated the potential benefits of deploying flexible hydrogen infrastructure in supplying both heat and electricity sectors at several billion pounds of savings in annual energy system cost. The transition to a low-carbon energy system would rely on various production technologies for green and blue hydrogen, including electrolyzers, biomass gasification and reformers, e.g., Steam Methane Reforming (SMR) and Autothermal Reforming (ATR), coupled with Carbon Capture and Storage (CCS) and negative emission technologies [30].

At the European level there are also expectations towards a significant increase of hydrogen use in transport, industry and the

building (heating) sector, where hydrogen can gradually substitute the current use of natural gas [31]. In the global context, hydrogen is recognised as a potential solution for sectors that are hard to electrify, providing a link between low-carbon electricity generation and the hydrogen demand sectors, although a number of barriers still exist for its widespread uptake [32]. Although challenges around the cost and performance of hydrogen technologies remain, they could become competitive in the medium term, which justifies the renewed interest and policy support for these technologies around the world [33].

Currently, hydrogen is mainly produced using reforming technologies [1]. However, biomass gasification and water electrolysis represent viable alternatives for producing green hydrogen in an energy system with a high share of renewable resources, and their costs have been declining [26,30]. Recent cost estimates foresee a further reduction in the cost of hydrogen production technologies [34].

Several recent publications have focused on integrating and utilising hydrogen in the context of the whole energy system. In Ref. [35], a hydrogen supply chain including production, storage, and distribution technologies is developed for the UK transport demand. In Ref. [36], another hydrogen supply chain is designed by optimising infrastructural and operational costs for the transport sector. In Ref. [37], a large-scale model is presented for optimising the interactions between electricity, hydrogen, and transport sectors and identify cost-efficient decarbonisation scenarios for the whole energy system in the UK.

In [38], a multi-node model is introduced to design the low-carbon integrated electricity and transport network in Italy while considering power-to-gas technologies that utilise excess electricity in zero-carbon transport. Another multi-node model is developed in Ref. [39] to investigate potential cost-effective low-carbon pathways for the future integrated energy system in Germany focusing on the integration of power-to-gas technologies, where the time-dependent characteristics of the integrated energy system are modelled by representative periods obtained by clustering techniques.

Although characterising the time-dependent nature of integrated energy systems through a limited number of representative periods simplifies computational issues, it may result in significant errors in capturing the requirements for flexibility in the energy system due to oversimplified temporal variations of both energy demand and intermittent renewable energy generation.

Modelling and optimising low-carbon energy systems with high penetration of intermittent renewable energy resources (particularly wind and solar) need both a technology-rich representation of energy generation, transport, storage and end-user consumption under different techno-economic constraints, as well as a

sufficiently accurate representation of spatial and temporal variations in energy supply and energy demand. In practice, simulating and analysing multi-vector energy systems with a high spatio-temporal resolution is computationally cumbersome [40].

To address these challenges, several approaches have been reported in the literature focusing on soft-linking multiple long-term and short-term models for optimising energy system investment and operation models in order to obtain a tractable energy planning problem offering a higher level of accuracy compared to separate utilisation of each model. Examples include soft-linking the JRC-EU-TIMES and the Dispa-SET models in Ref. [19], the JRC-EU-TIMES model and a behavioural model for transportation in Ref. [41], and TIMES and EMEC models in Ref. [42].

Multi-model approaches provide new insights that would not be possible using a single model approach; for instance, the authors of [43] reported that complementing the PRIMES energy systems model with an EU-28 electricity dispatch model suggested that PRIMES overestimated the variable renewable generation and underestimated curtailment and grid congestion.

Previous studies on model coupling have mostly focused on “unidirectional” soft-linking of long-term and short-term energy models. However, to the best of the authors’ knowledge, there is little research available in the literature with bidirectional results exchange between multiple investment optimisation models as a system of systems to decarbonise integrated heat and electricity sectors with sufficiently high spatial and temporal resolution under technology-rich representation.

Therefore, to enhance accuracy and ensure tractability, a multi-model approach is proposed in this paper to study the decarbonisation of integrated heat and electricity sectors in the UK through bidirectionally linking the Resource-Technology Network (RTN) model [44], characterised by high spatial resolution and technological detail for hydrogen supply network, and the Whole-electricity System Investment Model (WeSIM) that represents the power system with high temporal resolution and a high level of technical detail [24].

RTN model is a spatio-temporal Mixed-Integer Linear Programming (MILP) model that has been used previously to assess the potential of hydrogen in the decarbonisation of the UK’s heating sector. For instance, a model based on wind power is presented in Ref. [45] to supply domestic heating demand through either electric heaters or hydrogen production via water electrolysis. The authors reported that the selection of hydrogen-based technologies was sensitive to the availability of large-scale hydrogen storage.

A similar observation was made in Ref. [46], which further concluded that cost-optimal regions for deploying hydrogen infrastructure for heating tend to be characterised by higher heating demand and located in proximity to hydrogen and CO₂ storage sites. The same study also concluded that the use of large-scale hydrogen storage and deep geological reservoirs for CO₂ would allow for a cost-effective transformation of the incumbent natural gas-based heat supply system to hydrogen.

RTN allows for developing long-term energy system strategies through multi-period analysis. In the context of decarbonisation, it enables the identification of cost-efficient pathways to transform the existing energy system and reach the goal of net-zero emissions. Different options have been considered to transition from current fossil fuel-based systems, including the electrification of heat and transport sectors.

In the domestic transport sector, the potential of new onshore wind farms to supply zero-carbon transport demand has been explored for electric [47] and for hydrogen-based vehicles [48]. On a district level, carbon-constrained cost-optimisation models based on the RTN framework have explored decentralised systems for domestic and commercial heat and electricity supply [49,50].

The other model that is used for assessing the heat decarbonisation options in this paper is the Whole-electricity System Investment Model (WeSIM), presented in Ref. [24]. WeSIM has been used extensively to study the challenges of integrating large volumes of low-carbon generation in future electricity systems, including the role and value of flexible technologies such as smart EV charging [51], Vehicle-to-Grid [52], battery storage [53], pumped-hydro storage [54] and liquid-air and pumped-heat energy storage [55].

The objective of this paper is to take advantage of the two models’ strengths to assess heat decarbonisation pathways for the UK, i.e., to utilise the high geographical detail and the range of hydrogen production and end-use heating technological options considered in RTN and combine them with a high temporal resolution and detailed representation of the electricity system enabled by WeSIM.

To the best of authors’ knowledge, there is no multi-model approach in the literature based on interactions between multiple models for heat and electricity sectors with high spatial and temporal resolutions, as presented in this paper, that determine both the design as well as operation of a low-carbon energy system with hydrogen-based technologies.

1.2. Contributions

In light of the above, the key proposed contributions of the paper are the following:

1. Develop a multi-modelling approach to study pathways for cost-efficient decarbonisation of heat supply using electricity and hydrogen;
2. Propose a methodological framework for soft-linking two established energy system models with different geographical scopes, temporal resolutions and technology coverage;
3. Determine the cost-effective technology mix for delivering zero-carbon heat through a combination of electrification and hydrogen-based heating.

1.3. Paper structure

The remainder of the paper is organised as follows. In Section 2, the proposed method for linking the RTN and WeSIM models is discussed in detail. Section 3 presents and discusses different case studies for decarbonising the integrated heat and electricity sectors in the UK by 2050. Finally, Section 4 summarises the main conclusions of the paper.

2. Method

This section presents the multi-model assessment approach used in this paper and outlines the key features of RTN and WeSIM model. It also summarises the key assumptions and scenarios used in the quantitative studies.

2.1. Rationale for multi-model assessment

The multi-vector models proposed in literature generally do not simultaneously deal with issues such as technological richness, computational complexity associated with fine temporal scales, coordination of district and national objectives, uncertainty, and multiple agent perspectives including the interactions between national and local energy systems [39,56,57].

In order to overcome the limits of the existing energy system models, the IDLES research programme [58], which also includes

the analysis presented in this paper, aims to propose a framework for creating a system-of-systems model that is computationally tractable when dealing with multi-physics models across energy carriers, with high temporal resolution (to capture temporal features of technology and system operation) and with high spatial resolution (for accurate reflection of national and local impact of various types of energy infrastructure). The ambition of this framework is to achieve technology richness sufficient to inform technology development goals, establishing the value that different technologies can provide to the energy system and how this relates to the infrastructure planning, technologies design and operational strategies.

In this context, the key aim of this paper is to combine the high spatial resolution, multi-vector and sector coupling features of RTN with the high temporal resolution and detailed representation of the power system of WeSIM. The multi-model approach allows for an enhanced representation of the complex interactions associated with energy system design and operation at both local and national levels, quantifying with higher accuracy the aspects such as the benefits of flexibility, coupling between electricity, heat and hydrogen, energy storage and ancillary services.

Moreover, the integrated approach that combines the capabilities of RTN and WeSIM models could better identify and quantify the system-wide benefits of technologies and infrastructures that cross the boundaries between electricity, heat and hydrogen supply systems.

The areas of investigation proposed in this application include heat decarbonisation technologies via electric and/or hydrogen systems and the consequent implications in terms of energy system flexibility and storage needs to enable a high penetration of intermittent renewable energy sources for net-zero energy scenarios by 2050. However, the proposed multi-model approach could be suitable to appreciate the system value of other zero-carbon heating technologies as well as inter-seasonal heat storage.

2.2. Key features of RTN

In this work, the RTN model presented in Ref. [46] is extended and adapted for the integration with WeSIM. It simultaneously optimises the design and operation of hydrogen and CO₂ infrastructures to supply domestic and commercial heating demand. For this work, the pressure levels in hydrogen pipelines are however omitted.

In the general RTN formulation, any material or energy stream is a resource that can be consumed, produced, or stored using different technologies. Fig. 1 illustrates the main components of the model: imported resources/fuels, various hydrogen production technologies, hydrogen and CO₂ storage technologies, and end-use heating technologies.

While the generation of hydrogen and CO₂ is explicitly modelled, electricity, biomass and natural gas can be imported. Electricity is the only imported resource that can be used directly to provide heat via heat pumps, without explicitly considering the need for dedicated infrastructure. All three resources can also be used to produce hydrogen via water electrolysis, biomass gasification or reforming of natural gas coupled with CCS (SMR or ATR).

The captured CO₂ is transported and stored at offshore sites. If the produced hydrogen is not consumed locally, it can be transported via pipelines and stored in salt caverns for intra-day and inter-seasonal storage. Pressurised vessels are considered as additional hydrogen storage. Each technology is characterised by its capital cost, conversion efficiency, lifetime and operational costs. For the cost of the resources, the model distinguishes between wholesale and retail prices for electricity, natural gas and hydrogen.

Similar to the widely used UK TIMES model [59], the RTN model

uses 16 time slices to represent temporal variations in demand. These include four representative daily periods across three seasons (winter, autumn/spring and summer) plus the explicit consideration of the peak winter heat demand day to ensure correct sizing of the supply infrastructure capacity. The four daily time slices correspond to daytime, evening peak, late evening, and night periods.

The full time horizon of 2030–2060 considered in the optimisation is divided into three major investment periods, each consisting of 10 years. The annual heat demand and electricity price profiles are aggregated based on hourly profiles and therefore vary across different time slices. While the biomass price is assumed to remain constant throughout the planning time horizon, the price of natural gas is assumed to vary seasonally.

For the supply chain optimisation, the geographical area of Great Britain is divided into 51 equally sized cells using the open-source Geographic Information System QGIS [60]. Each cell is characterised by the heat demand profile of the domestic and commercial sector, its distance to neighbouring cells, available geological hydrogen storage capacity and existing natural gas transmission lines. The offshore sites for CO₂ storage are considered by specifying three additional grid cells, one located in the East Irish Sea and two in the North Sea.

The objective function in RTN is to minimise the total Net Present Value (NPV) of system cost over the entire time horizon, comprising the investment cost of technologies chosen for installation and the operating costs that are calculated based on the cost of imported resources and operating parameters of the technologies. The full RTN formulation is presented in Ref. [46].

2.3. Key features of WeSIM

Capturing the interactions across different time scales and across different asset types is essential for the analysis of future low-carbon electricity systems that include flexible technologies such as energy storage and Demand Side Response (DSR). Deploying these technologies can improve not only the economics of real-time system operation, but also reduce the required investment into generation and network capacity in the long run.

In order to characterise these effects, and in particular trade-offs between different flexible technologies, it is critical that they are all included in a single integrated modelling framework. To this end, a comprehensive system analysis model WeSIM has been developed that is capable of simultaneously optimising long-term investment decisions against short-term operation decisions, across generation, transmission, storage and distribution infrastructures, in an integrated fashion. A detailed formulation of the model is provided in Ref. [24], and the model has been implemented in FICO Xpress Optimisation framework [61].

WeSIM determines optimal decisions for investing into generation, network and storage capacity (both in terms of volume and location), aiming to supply the projected electricity demand in an economically optimal way, while at the same time ensuring appropriate security and adequacy levels for electricity supply.

An advantage of WeSIM over most traditional models is that it is capable of simultaneously including system operation decisions and capacity additions to the system, with the ability to quantify trade-offs of using alternative mitigation measures, such as DSR and storage, for real-time balancing and transmission and distribution network and/or generation reinforcement management.

Additionally, a key feature of the WeSIM model is the ability to optimally determine the necessary investments in distribution networks in order to meet demand growth and/or distributed generation uptake, based on the concept of statistically representative distribution networks [62].

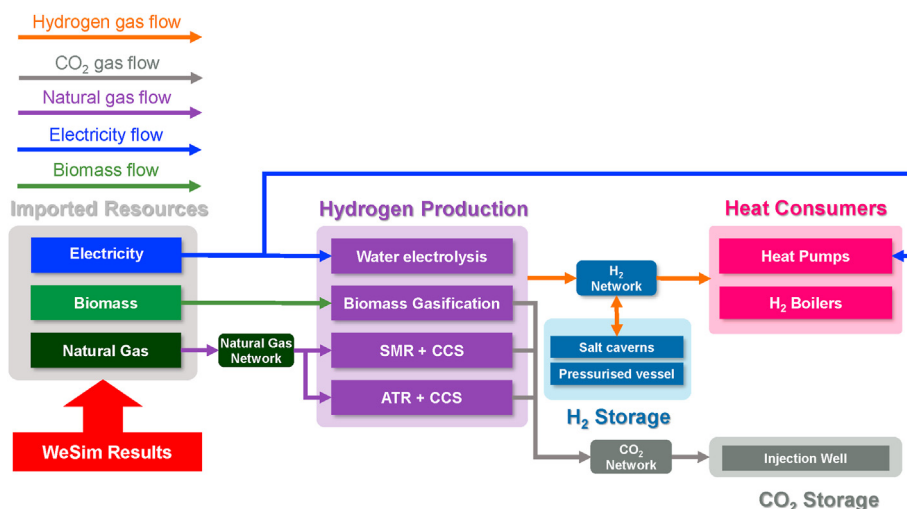


Fig. 1. High-level diagram of RTN model.

It is essential to use high temporal and spatial granularity when studying electricity systems with high shares of variable renewables. Previous WeSIM applications have clearly demonstrated that in order to accurately quantify system operation and investment costs and assess CO₂ emissions of various generation technologies, it is necessary to simulate second-by-second power balancing at the same time as multi-year investment decisions (e.g., low inertia in grids with high shares of renewables may trigger significant investment in flexible technologies).

Also, electricity system decarbonisation will require capturing synergies and conflicts related to infrastructure requirements in local/district and national/trans-national levels, which is another essential capability of the WeSIM model.

WeSIM solves a single optimisation problem by finding the set of least-cost investment and operation decisions, while considering two different time horizons: (1) short-term operation periods with a typical resolution of 1 h or half an hour (while also taking into account frequency regulation and short-term reserve requirements), and (2) long-term investment, i.e., planning decisions with the time horizon of typically one year.

All annual investment decisions and 8760 hourly operation decisions are determined simultaneously in order to achieve the overall optimality of the solution. In summary, key features and constraints of WeSIM include: a) supply-demand balance, b) reserve and response requirements, c) generator operating limits, d) DSR capability, e) energy storage balance and operating limits, f) transmission and distribution network investment/reinforcement, g) carbon emission constraints, h) constraints on electricity imports/exports, and i) system adequacy and security constraints.

For the purpose of this paper and to enable the integration of WeSIM with RTN outputs, the original formulation of WeSIM has been extended to also explicitly consider technologies for hydrogen production, storage and transport. On the hydrogen production side these include electrolysis, ATR and SMR, all of which require electricity input, which affects the level of demand to be met by the power system.

A high-level diagram of WeSIM (as used in this paper) is presented in Fig. 2.

2.4. Linking the two models

Fig. 3 presents the interactions between the two models used in this paper. RTN is used to find the cost-optimal investment plan to

decarbonise the heat supply by solving a MILP problem with hourly electricity costs resulting from a first run of WeSIM, while WeSIM finds the optimal system configuration to decarbonise the electricity sector using a Linear Programming (LP) model formulation and using the heat technology mix and hydrogen network resulting from RTN.

In the RTN model, air-source heat pumps (ASHP), hydrogen boilers and hybrid ASHPs are considered as options to supply zero-carbon heat to consumers in the residential and small commercial heating sector. Hybrid ASHP corresponds to a combined unit of ASHP and hydrogen boiler, each contributing half of the total heat output capacity.

Both ASHPs and hydrogen boilers are assumed to be zero-carbon heat technologies. However, the use of hydrogen boilers will be associated with some NO_x emissions that could cause local air quality issues. These emissions are however expected to be lower than comparable NO_x emissions from gas boilers. Under appropriate legislation the market should be able to deliver hydrogen boilers with high efficiency and minimal NO_x emissions [63,64].

The focus of the paper is on the integration between the two models with the objective to identify cost-efficient zero-carbon heat pathways for individual end-user heating technologies. District Heat Networks (DHNs) were not included in the scope of the analysis, although it is understood that they could make a significant contribution to the low-carbon heat sector [65].

One reason for not including DHNs is the increased complexity associated with aggregating and representing DHNs in energy system models due to the dependence of their cost and technical characteristics on network topologies and heat densities. Another reason is that, although it has been suggested in Ref. [15] that it would be cost-efficient to supply 16–21% of UK’s heat demand from DHNs (predominantly in urban areas with sufficiently high heat density), the total system cost for a scenario with DHNs was found to be only marginally lower (by 0.4%) than for a scenario that only considered hybrid HP solutions.

Similarly, a study by the UK Government [66] suggested 20% as an upper bound on the share of heat from DHNs, noting that the actual cost-efficient level is likely to be much lower. There is further uncertainty around the available volume of waste heat for supplying DHNs, as this volume may diminish in the future with the decarbonisation of energy-intensive industries [67].

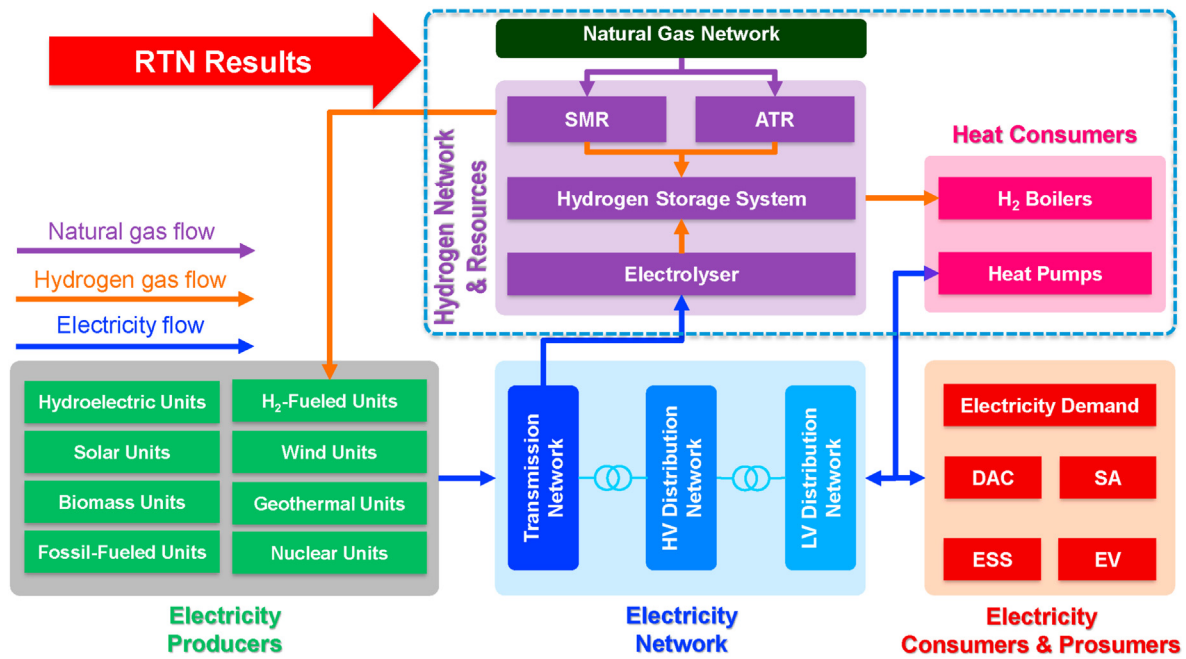


Fig. 2. High-level diagram of WeSIM model.

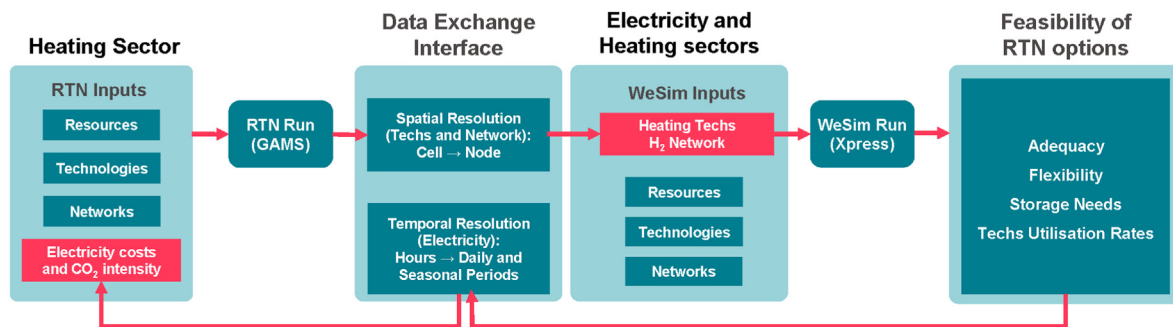


Fig. 3. High-level diagram of interactions between RTN and WeSIM.

In earlier decades of the study period (i.e., in 2020s and 2030s) it is assumed that there will still be legacy conventional gas-fired boilers delivering heat, although they are gradually decommissioned due to the dual effect of reaching the end of lifetime and increasingly tighter carbon emission limit imposed on the heat supply.

WeSIM on the other hand considers various types of zero-carbon (e.g., renewables, nuclear or hydrogen-fuelled generation), carbon-positive (e.g., gas-fired CCGT and CCS generation) and carbon-negative (e.g., direct air capture) technologies to supply electricity consumers with a specified level of carbon intensity.

In addition to baseline electricity demand, the power sector configured by WeSIM also needs to supply the electrolyser and HP demand characterised in RTN (Fig. 1), while the hydrogen production technologies (electrolysers, ATR and SMR) all supply hydrogen for both end-user hydrogen boilers as well as for any hydrogen-fuelled generators considered in WeSIM (Fig. 2). Therefore, RTN and WeSIM models are co-dependent given that each RTN run requires inputs from WeSIM and vice versa.

The iterative procedure illustrated in Fig. 3 starts with the first set of WeSIM runs for the three snapshot years (representing the three decades, 2030–2040, 2040–2050 and 2050–2060) while

assuming a fully electrified GB heat supply i.e., with all domestic and commercial heat requirements delivered through HPs and no contribution from hydrogen to zero-carbon heating.

These runs determine the least-cost configurations of the electricity system for each of the three representative years. They also produce hourly series of electricity prices (estimated using dual values, i.e., marginal electricity prices determined by the model) for the three representative years.

Hourly prices are then aggregated into 16 electricity price levels according to the RTN time slice specifications. RTN uses this input to determine the cost-optimal decarbonisation trajectory for the heat sector, i.e., the optimal mix of hydrogen and electricity in the heat supply mix given the variations in electricity prices provided by WeSIM.

This optimal investment plan is passed onto WeSIM, including capacities and locations of hydrogen production technologies (electrolysers, ATRs and SMRs), hydrogen transport infrastructure and hydrogen storage systems, as well as the mix of end-use supply of domestic and commercial heat through HPs and hydrogen boilers.

Based on this information, the electricity and hydrogen demand profiles in WeSIM are updated, and the next iteration of the model

is run to find the updated cost-optimal system configuration for the electricity sector. This solution also includes an updated set of hourly electricity prices for RTN. In principle, this iterative procedure could continue until there is little or no change between solutions for two successive iterations. For the sake of simplicity, only the results of the first two iterations are presented in this paper.

In its original form, the RTN solution specifies the infrastructure and resources required to satisfy the residential and commercial heating demand in each of the 51 cells. Before passing that information onto WeSIM, the cell-level solutions need to be aggregated into 5 regions used in WeSIM to represent the GB electricity system based on a predefined cell-to-region mapping procedure. The aggregated information is then sent to WeSIM to re-optimize the capacity mix and operation of the electricity system as well as the hourly provision of heating based on capacities determined by RTN.

2.5. System scenarios and main assumptions

System-level assumptions used in the paper, and in particular the assumptions on the heat demand level, were broadly based on the System Transformation scenario from National Grid's FES [12].

To study the trajectory of GB heat decarbonisation, three decades have been considered in the analysis: 2030–2040, 2040–2050 and 2050–2060. In the last decade (2050–2060) it was assumed that heat supply needs to be fully decarbonised i.e., producing zero CO₂ emissions; therefore the only options to deliver zero-carbon end-use heat in RTN were electric HPs, hydrogen boilers or their hybrid combination.

Carbon emission limit from heat supply was reduced linearly from its 2030 level to zero in 2050–2060, taking into account emissions from using natural gas in reforming technologies and carbon intensity of electricity used to run electrolyzers. When determining the cost-efficient mix of producing hydrogen for heat supply under a carbon constraint, the RTN model had an option to invest in negative-emission technologies such as biomass gasification with CCS in order to offset any residual emissions from SMR and ATR facilities.

Carbon intensity of the power system in WeSIM was constrained to 41 gCO₂ per kWh in 2030–2040, and then to net zero carbon emissions in 2040–2050 and 2050–2060.

The wholesale price of natural gas used in reformers in RTN was assumed to follow a seasonal variation, with the price of £15.81/MWh in summer and £17.71/MWh in winter. Retail electricity prices used in RTN were obtained from WeSIM wholesale prices by imposing a ratio of 2.2 between wholesale and retail price and a retail price cap of £528/MWh.

Costs of electricity supply technologies used in WeSIM were assumed in line with [28]. Cost assumptions for hydrogen production, storage and transportation technologies in RTN were taken from Ref. [46], while their future cost reduction trends were based on the recent UK Government study on the cost of hydrogen [34].

A build rate limit of 8 GW of new hydrogen production capacity per year was imposed in RTN to match the build rates implied in Climate Change Committee's Sixth Carbon Budget [68]. Total annual heat demand for combined residential and commercial sectors assumed in the model was assumed to reduce linearly from 541 TWh in 2020 to 476 TWh in 2050–2060, reflecting improvements in energy efficiency, i.e., building insulation levels.

Both RTN and WeSIM assumed seasonal variations in the Coefficient of Performance (COP) of ASHPs in line with typical variations in outdoor temperature in GB. In line with the wider decarbonisation objectives, the electricity system was also assumed to incorporate a high share of electrified road transport (i.e., electric vehicles).

Interconnection between GB and continental Europe was also modelled in WeSIM, assuming energy neutrality for the GB electricity system (i.e., although at any hour interconnections can be used to export or import electricity, the total exports match total imports over the course of a year). Security of the GB power system was ensured by enforcing a standard Loss of Load Expectation (LOLE) criterion of up to 3 h per year.

Further details on the technical and cost assumptions for various technologies used in this study are provided in the Appendix.

3. Results and discussion

This section outlines the key results obtained from running the two models, focusing on how their interaction affects the proposed power system configuration and the heat supply mix. The results of this analysis are highly dependent on the input assumptions considered, which are subject to a large degree of uncertainty. Therefore, the main focus is on how the two models could effectively exchange information and in the process gradually improve the quality of the solution.

3.1. First WeSIM run

In the first instance, WeSIM is run to cost-optimize the electricity generation mix under system-wide carbon constraints specified in Section 2.5. As mentioned before, this optimisation was carried out under the assumption that the domestic and commercial heating sector is 100% electrified, which is obviously not a realistic option, especially in the earlier decades in the analysed period. Nevertheless, this approach was deemed justified for the first WeSIM iteration in order to test the boundaries of the solution space before the solution is refined through subsequent iterations, also considering that part of the renewable electricity consumed for heating in the first WeSIM run could be instead used for hydrogen generation to supply heat in the RTN optimisation.

As shown in Fig. 4, the model builds a portfolio of low-carbon generation technologies to meet a very high level of demand due to the assumption on full electrification of domestic and commercial heating. The total installed generation capacity gradually reduces between the first and last decades as the level of heat demand decreases due to improved energy efficiency.

The low-carbon generation technologies chosen for installation in the GB system mainly include onshore and offshore wind and solar PV, supported by a very large volume of battery storage

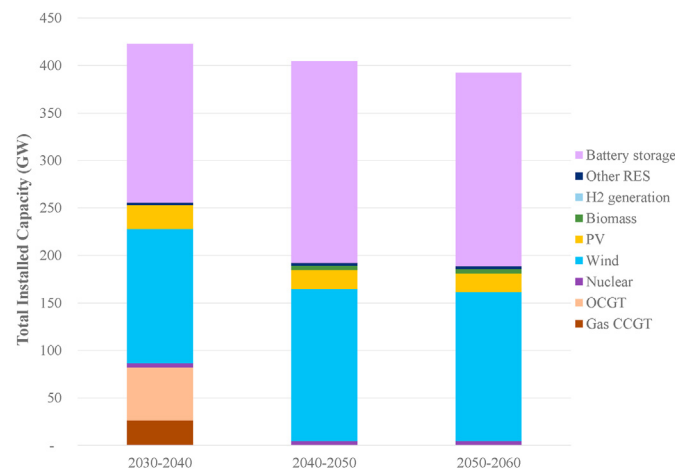


Fig. 4. Total electricity generation and battery storage capacity in first WeSIM run.

capacity (between about 150 and 200 GW). Other technologies in the generation mix include nuclear, biomass and other RES, while in the first decade there is also a significant amount of gas generation, which is able to make a contribution to electricity supply because of a less stringent carbon constraint.

It is clear that delivering such a high volume of renewable and battery storage capacity by the first decade would not be feasible, and neither would it be realistic to fully electrify the domestic and commercial heat supply in such a short time frame. Still, it is useful to explore the boundaries of the system and establish what would be the composition of an unconstrained system portfolio.

WeSIM also produces a set of hourly electricity prices that reflect short-term fluctuations in supply and demand balance in the system. Fig. 5 shows the hourly power price variations obtained from WeSIM for year 2050. Electricity price broadly varies in the range £50–70/MWh during winter, and between £40–50/MWh during summer, with occasional price drops to lower levels during periods of high renewable output.

Around Day 25 of the year, the cold temperatures cause a spike in electricity demand for heating (also accentuated by lower COP values), and as a consequence also drives a spike in electricity prices to over £6000/MWh (note that these are outside of scale in Fig. 5 as they would dwarf other price variations).

Marginal prices determined in WeSIM reflect the scarcity of electricity supply not just in terms of energy but also in terms of necessary marginal investment in generation, storage and network infrastructure required to meet high peak demand driven by extremely cold weather. Therefore the prices associated with very high peak demand around day 25 tend to be well above £1000/MWh.

Hourly prices from WeSIM are aggregated into the 16 time slices used to represent each year in RTN, by finding the average price for all hours that are associated with a given time slice. As discussed earlier, 4 representative seasons are used: winter (consisting of 124 days), autumn/spring (85 days), summer (155 days), and an explicitly represented winter peak day. Within each day four slices were used to represent night (0–7h), day (7–17h), peak (17–20h) and evening (20h-midnight).

In addition to temporal aggregation, the wholesale prices from WeSIM were further converted to retail prices before being used in RTN, by applying: a) retail to wholesale price ratio of 2.2, and b) retail price cap of £528/MWh.

Fig. 6 illustrates the retail electricity prices used in RTN across various time slices in 2050, obtained based on WeSIM wholesale

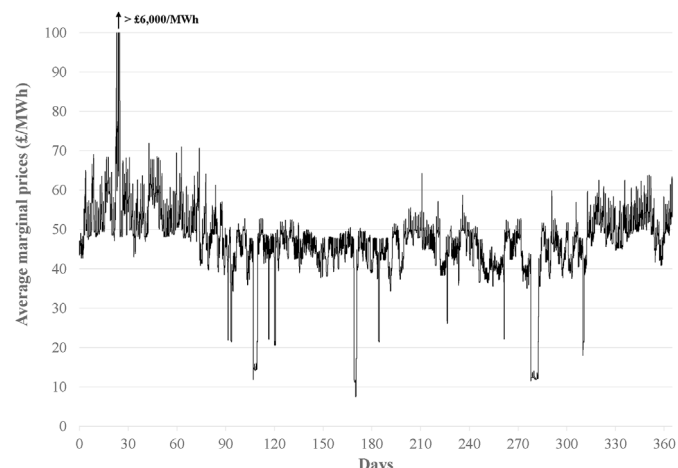


Fig. 5. Hourly electricity prices from first WeSIM run in 2050.

hourly prices in Fig. 5. Note that the scale used for the winter peak day is much larger than for the other three representative days, given that for two time slices on winter peak day the price hits the retail price cap level.

3.2. First RTN run

The first iteration of RTN uses the retail electricity prices obtained as described in the previous section to determine the cost-optimal split of low-carbon heat supply between electricity and hydrogen and also to determine the required capacities of hydrogen production, storage and transport infrastructure. Fig. 7 presents the resulting mix of hydrogen supply technologies across the three decades and for different time slices.

Total hydrogen generation capacity in 2030–2040 is about 35 GW, increasing to about 115 GW in 2040–2050. The model therefore deploys as much hydrogen production capacity as allowed by the assumed national build rate limit of 8 GW/year. The preferred hydrogen generation technology is SMR with syngas capture due to its relatively low investment cost although it is less efficient and has higher emissions than the alternatives considered in the model.

ATR with gas heated reformer (GHR) and CCS is only deployed in cells with available underground hydrogen storage. In 2050–2060, 0.8 GW of biomass gasification capacity is added as a net negative emission technology, in order to compensate for the emissions from SMR plant and meet the net zero carbon constraint.

To minimise the need for transport infrastructure, most of the hydrogen requirements are met locally except in the Greater London area, where heat demand exceeds the national limit on build rate and makes it necessary to build transport infrastructure between Central and South East England. The majority of the CCS pipeline system in England is built by 2030–2040 to transport CO₂ from hydrogen production to injection wells in the East Irish Sea and North Sea.

The net zero carbon constraint imposed in 2050–2060 requires offsetting of any CO₂ emissions from hydrogen production or producing green hydrogen via electrolysis. However, electrolysis does not seem to be cost-competitive to other sources of hydrogen. Negative emission technologies require higher investment, which makes the use of large volumes of hydrogen throughout the year expensive.

Therefore, producing hydrogen from SMR while at the same time offsetting emissions via biomass gasification is only cost-effective for the winter peak demand day. In order to compensate for SMR emissions, biomass gasification plants need to operate not only during the winter peak demand day but also during other winter days to ensure the appropriate volume of carbon emissions is captured.

The results suggest that the volume of hydrogen used in the heating sector would be the greatest in the intermediate time horizon (2040–2050), as a means to transition the heat sector from natural gas-based to predominantly electricity-based supply in a bid to eliminate carbon emissions. Even in the fully decarbonised heat sector in 2050–2060, hydrogen still plays a role as source of heat during peak demand periods, which is preferred to installing additional capital-intensive ASHP capacity that would operate at low utilisation factors.

The cost-optimal mix of heat supply technologies found in the first iteration of RTN is shown in Fig. 8. The extent to which hydrogen and electricity are used is driven by the emission reduction trajectory, allowing natural gas boilers that are in place today to operate until 2040.

Commercial demand is decarbonised earlier as its volume is assumed to be considerably lower and its heat demand profile less

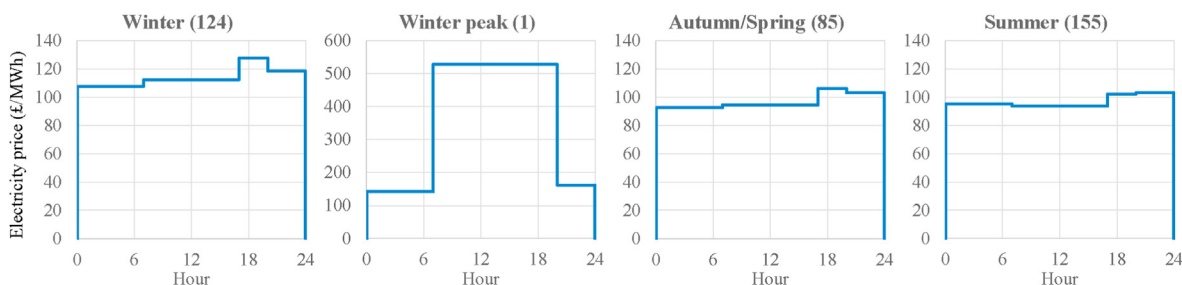


Fig. 6. Retail electricity prices across time slices in RTN in 2050. Numbers in brackets denote the number of days in each representative season.

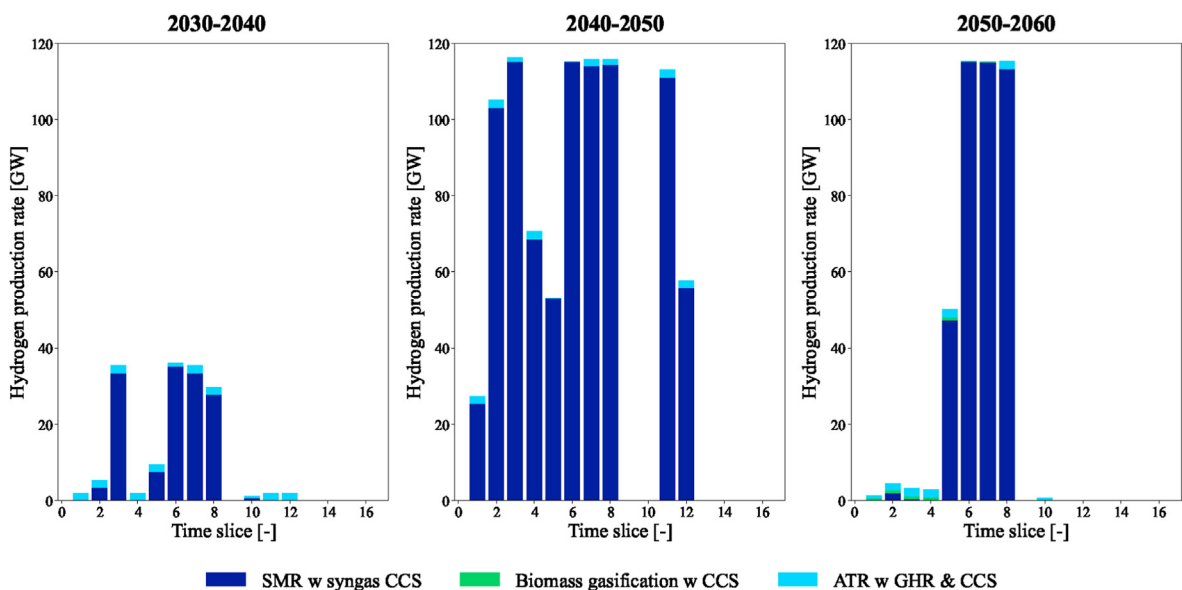


Fig. 7. Hydrogen supply in first RTN run across three decades.

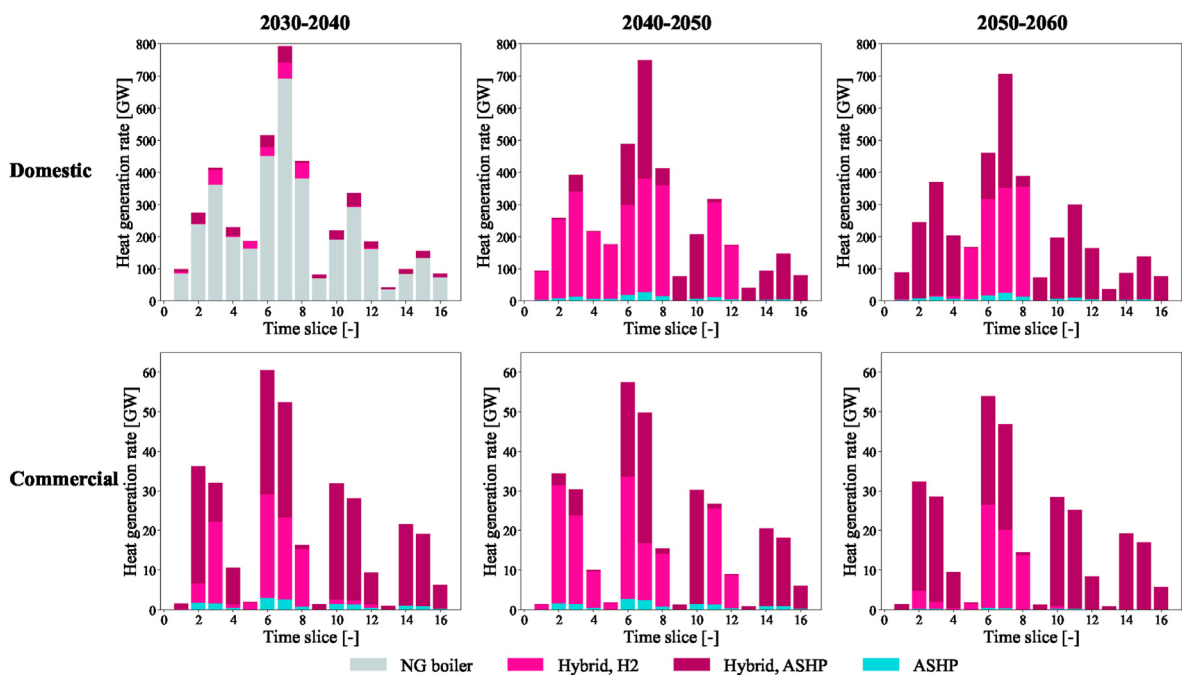


Fig. 8. Supply of domestic and commercial heat in first RTN run across three decades.

peaky than the domestic demand. By 2050–2060, the CO₂-neutral production of hydrogen via renewable electricity and electrolysis is not cost-competitive to the direct use of electricity in ASHP. ASHP are favoured due to the higher overall efficiency and the retail price cap assumed to be in place to protect domestic and commercial customers from spikes in wholesale electricity prices.

Hydrogen is first used in 2030–2040 to contribute to meeting the heat demand of the commercial sector during winter peaks. A small share of domestic demand also transitions to hybrid hydrogen-electric systems.

In 2040–2050 the share of hydrogen in commercial heating increases further, supplying the majority of heat demand during winter and autumn/spring seasons; a similar supply pattern is observed for the domestic sector. In 2050–2060, no new hydrogen production capacity is added as hydrogen is only used to top up commercial and domestic heat during the winter peak day, while at other times hybrid ASHP units operate in electric mode to cover the entire heat demand.

Conventional ASHP units are deployed to a small extent in areas where hydrogen supply is not cost-effective due to remoteness and relatively low heat demand. The reason for the reduction in the share of hydrogen in the low-carbon heat supply in 2050–2060 compared to the previous decade lies in the net-zero carbon emission limit in 2050–2060, which makes hydrogen production from reformers with non-zero CO₂ emissions relatively less attractive given that their carbon emissions need to be offset by installing net carbon negative technologies such as biomass gasification.

3.3. Second WeSIM run

The second run of WeSIM used the domestic and commercial heat demand split between electricity and hydrogen as determined in first RTN run. The resulting capacity mix in the second WeSIM run is presented in Fig. 9.

When compared with the results of the first WeSIM run (Fig. 4), it is immediately obvious there are less extreme requirements for generation and storage capacity in the short-run (although the required capacity additions to today's system are still very ambitious). Instead, one can observe a more gradual increase in supply over the decades as the level of heat electrification rises in line with the assumed carbon reduction trajectory for heating imposed in RTN.

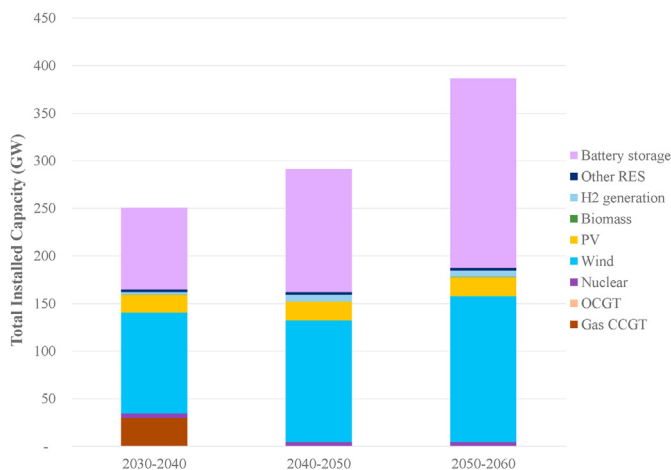


Fig. 9. Total electricity generation and battery storage capacity in second WeSIM run.

As opposed to the first run, no peaking OCGT capacity is required in 2030–2040 as the actual share of electrified heating is relatively low. The total combined capacity of wind and solar PV in 2030–2040 reduces from 165 GW in the first run to 125 GW, while battery storage capacity effectively halves from 167 to 85 GW.

The capacity mix in 2050–2060 is very similar to the one found in the first run (Fig. 4), which assumed 100% heat electrification. The main difference is that the requirements for firm low-carbon generation, which in the first run were met by nuclear and biomass generation, are now met by nuclear and hydrogen generation. This is enabled by the opportunity to cost-effectively produce hydrogen (mostly through SMR capacity featuring in the RTN solution), some of which is used to produce electricity in hydrogen-fuelled CCGT and OCGT units during times when firm low-carbon output is required in the system.

Driven by the lower electricity demand, the updated electricity prices for the first decade (2030–2040) were also considerably lower; as an illustration, the (non-weighted) average price reduced from £52.2/MWh to £48.3/MWh. The differences for the other two decades were much smaller given the smaller differences in electrified heat demand between the first and second run. The first run average prices of £54.3/MWh observed in both 2040–2050 and 2050–2060 reduced to £53.8/MWh and £54.2/MWh, respectively, in the second run.

The total volume of wind generation proposed by the model reaches around 150 GW in 2050–2060, which is significantly higher than the currently installed wind capacity in the UK (24.6 GW as of April 2022). Nevertheless, this capacity is still in line with the estimated wind potential in the UK. For instance, National Grid's FES project the wind generation capacity in 2050 at 158 GW [12], while the Climate Change Committee's Sixth Carbon Budget reports an estimate of 124–341 GW for the UK's wind potential [68]. Annual generation output across different technologies for both WeSIM runs is provided in Table A3 in the Appendix.

3.4. Second RTN run

An updated set of electricity prices produced in the second WeSIM run (similar to the one in Fig. 5) was used for the second RTN run, after applying the same retail to wholesale price ratio and a retail price cap to obtain time slice prices. The resulting hydrogen production mix across different decades and time slices is shown in Fig. 10.

There are no significant changes in total hydrogen production capacity between the first RTN run (Fig. 7) and the second. About 80 GW of capacity is still added between 2030-2040 and 2040–2050, corresponding to the maximum allowed build rate for the 10-year interval. The main change from the first iteration is that no ATR capacity is added until 2050–2060, as it is made less attractive by lower electricity prices, particularly during 2030–2040, which is when most ATR investment decisions were made in the first RTN run.

The pattern of hydrogen production remains very similar for the last two decades. On the other hand, the output pattern in 2030–2040 changes visibly as much less hydrogen is used to supply heat during the winter day (time slices 1–4) as the electricity is available at lower prices than in the first iteration and therefore ASHPs take over most of the heat supply for that day.

Also, there is no more hydrogen output from ATR that was previously used locally in some cells during the winter. Similarly, in the spring/autumn season the contribution of hydrogen to heat supply becomes negligible. Hydrogen remains to be used at a high rate during the winter peak day in 2030–2040, when electricity prices hit the retail cap level (time slices 5–8).

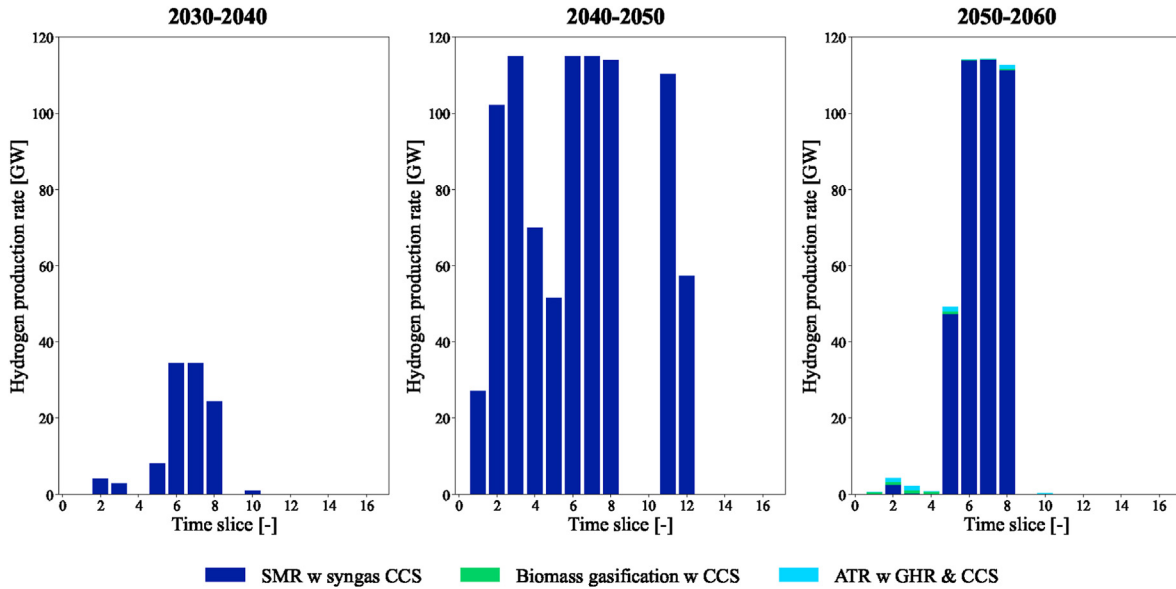


Fig. 10. Hydrogen supply in second RTN run across three decades.

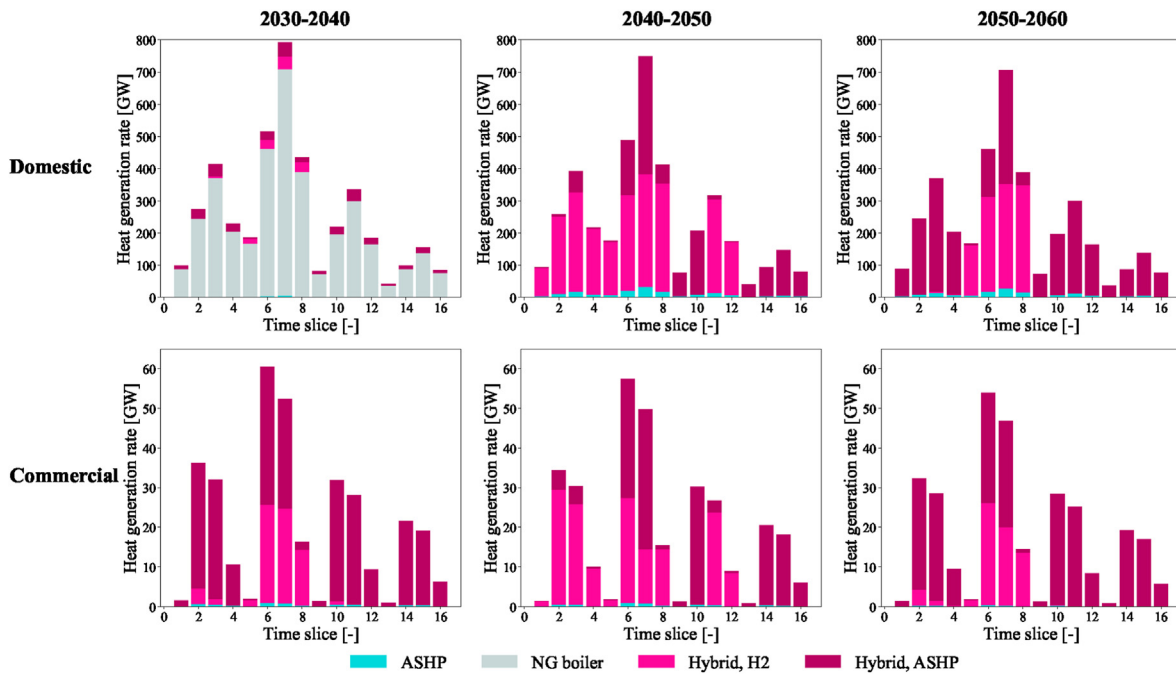


Fig. 11. Supply of domestic and commercial heat in second RTN run across three decades.

As shown in Fig. 11, the structure of end-use heat supply does not change significantly from the first RTN run (Fig. 8), with high presence of natural gas in the domestic sector and a mix between electricity and hydrogen in the commercial sector in the first decade. Hydrogen is still the dominant source of heat during 2040–2050, while in the final decade the net-zero carbon target makes ASHPs the preferred heat source and hydrogen takes over the role of top-up heat source during extremely cold periods.

The main notable difference between the two RTN runs is the lower use of hydrogen in winter days in 2030–2040 (time slices 1–4), which is driven by lower electricity prices used for this decade in the second RTN run, as discussed earlier. In both sectors, hybrid ASHPs are the dominant option as they have the advantage

of supplementing the heat supplied from electricity with heat generated using the hydrogen boiler sub-unit during extreme days.

The volume of natural gas used for heating, whether directly in gas boilers or indirectly by producing hydrogen in reformers, declines over the study period. The estimate used for the current annual gas consumption is 580 TWh. In 2030–2040, the consumption of gas for heating drops to 368 TWh, as the combined result of energy efficiency improvements and partial electrification of heating; in the same decade, about 10 TWh of gas is used for hydrogen production in reforming plants. In the following decade (2040–2050) the use of gas for direct heating reduces to zero due to a more stringent emission target, whereas 379 TWh of gas is now used for producing hydrogen. Finally, in 2050–2060, as the heating

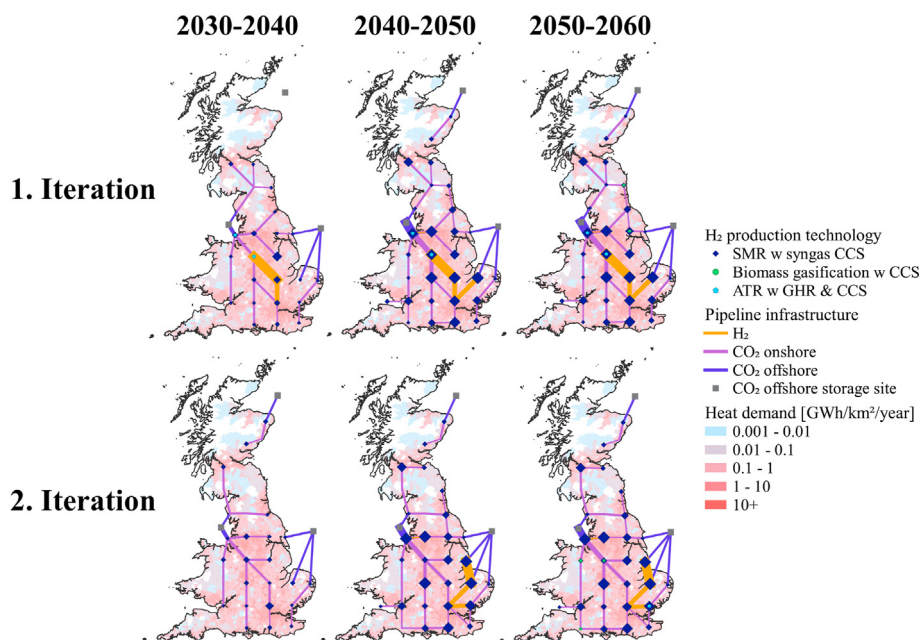


Fig. 12. Geographical distribution of infrastructure for hydrogen production and transport, and for CO₂ transport and storage in RTN across three decades and for both iterations. Sizes of hydrogen sources and widths of pipelines are proportional to their capacity. Plots are shown on top of GB heat density map.

sector gets predominantly electrified, the use of gas for hydrogen production drops to just 10 TWh.

3.5. Geographical distribution of hydrogen and CCS infrastructure

In addition to sizing the hydrogen production capacities, RTN also sizes the hydrogen and CO₂ transport network across its 51 cells used to represent the GB system. Fig. 12 provides more detail on the geographical configuration of these two pipeline systems, showing the locations and sizes of hydrogen production plants across different cells along with the locations and sizes of hydrogen and CO₂ pipeline infrastructure for all three decades and both RTN runs. Note that the sizes of hydrogen sources and widths of pipelines are plotted proportional to their capacity. All plots are superimposed over the GB heat density map.

In the first RTN iteration hydrogen pipeline capacity is built already in the first decade (2030–2040) to connect Central and South East England and supply the Greater London area, while also benefiting from cavern hydrogen storage in the Cheshire area. The CCS pipeline system also gets built by 2030–2040, covering most of England, in order to transport the carbon captured in the process of reforming gas to produce hydrogen.

The injection wells in the East Irish Sea and Southern North Sea are accessed first, followed by the Northern North Sea storage site. The extensive onshore CO₂ pipeline network is mostly built to transport CO₂ from South England to the East Irish Sea, which is preferred due to the proximity to the shore and therefore lower offshore pipeline cost. The storage in the Southern North Sea is mostly used for areas close to its shore.

As discussed before, the role of hydrogen in 2030–2040 diminishes in the second RTN iteration due to lower electricity prices, affecting the build schedule and configuration of hydrogen network to supply the London area. In the first iteration with higher electricity prices, the network design is driven by the co-location of ATR and intra-day hydrogen storage, which combine to produce hydrogen from ATR using cheaper electricity during the night (note that ATR uses more electricity than SMR per unit of hydrogen

output), and using storage to supply hydrogen to the London area.

In the second RTN run with lower electricity prices in 2030–2040, the ATR is no longer chosen as hydrogen source, so the location of hydrogen sources and pipelines is driven by the proximity to offshore CO₂ storage on the eastern GB shore. The layout of the CO₂ onshore pipeline network changes as well, in particular around the English-Scottish border and the Dorset area in the southwest.

This analysis did not consider any additional hydrogen demands that could arise from the decarbonisation of the industry and transport sector in the future. Extending the analysis by including these sectors would result in higher capacity requirements for hydrogen production and transport (including the CO₂ transport). Demand from major shipping ports and the energy-intensive industries at the coast of north England, south Wales and Scotland would introduce the most changes to the CO₂ pipeline infrastructure as the capacities of pipelines connecting these locations to offshore sites would need to be added or expanded. Assuming local hydrogen production would still be preferred, no significant changes to the hydrogen pipeline network would be expected.

Additional hydrogen demand for aviation and heavy goods transport would not significantly change the system configuration proposed by Fig. 12 given that the main hubs for aviation and goods transport are well aligned with the main heat demand centres.

4. Conclusion

This paper has proposed an approach for soft-linking two energy system models, RTN and WeSIM, in order to utilise their respective strengths to study the multifaceted issue of decarbonising GB heat supply by 2050. This dual-model approach allowed for a technology-rich representation of hydrogen production, storage and transport options with high spatial granularity provided by RTN, while at the same time taking advantage of high-fidelity representation of the low-carbon power system in the WeSIM model, using a fine temporal resolution and high level of technical detail.

The proposed approach allowed for the direct representation of linkages between the power system and the provision of end-use heat using hydrogen and electricity. Key input from WeSIM into RTN were hourly electricity prices that reflected the long-run marginal cost of providing electricity from carbon-constrained electricity system.

RTN used these inputs to cost-optimize the portfolio of zero-carbon end-use heat technologies as well as the portfolio of hydrogen production, storage and transport technologies along with the CCS infrastructure. The split of end-use heat supply between electricity and hydrogen was then returned to WeSIM to update its electricity demand profiles in the next iteration and provide an updated set of electricity prices to RTN for the next iteration.

Iterating between the two models led to gradual improvements of the solution, even when the process started with an extreme assumption of 100% electrification in the initial WeSIM run. This assumption resulted in overestimated requirements for new electricity generation capacity as well as higher electricity prices; however, with the revised electrified heating demand provided by RTN as input to the second iteration, WeSIM produced more moderate requirements for generation capacity as well as reduced electricity prices.

Quantitative results obtained by iterating between the two models suggest that their soft-linking can improve the quality of the low-carbon heating solution. Key findings based on the iterative use of the two models can be summarised as follows:

- Hydrogen can play a significant role in transition towards full heat decarbonisation, especially in the medium term, due to its ability to provide low-carbon heat with relatively low investment (both at end-use and large-scale production level) and operation costs. However, due to the non-zero carbon emissions, the attractiveness of gas reforming technologies even when equipped with CCS reduces as the system evolves towards the net-zero carbon constraint. At the same time, producing hydrogen from electrolysis does not appear cost-competitive compared to direct use of electricity in ASHPs. Nevertheless, even with a net-zero carbon heating supply hydrogen from SMR with CCS remains a cost-efficient option for providing peak heat supply capacity, in order to cope with rare but extreme cold weather events.
- In the short term (2030–2040) the majority of heat in the domestic sector continues to be provided by natural gas. The commercial sector, with lower demand levels and a less peaky profile, is decarbonised using a mix of electricity and hydrogen a decade earlier than the domestic sector.
- Model outputs suggest that the most cost-effective hydrogen production technology is SMR with CCS, despite a lower efficiency and higher carbon intensity than ATR or electrolyzers. Only a small amount of ATR capacity is installed, while in the net-zero system in 2050–2060 the carbon emission from SMR need to be offset by installing a small amount of biomass gasification plant with net negative carbon emissions.
- In order to meet the ambitious carbon reduction targets in the electricity sector (which drop to net zero already in 2040–2050), it will be necessary to significantly expand renewable generation and in particular the offshore wind in the UK. To manage fluctuations in renewable output it will be necessary to ensure adequate levels of system flexibility by installing large volumes of battery energy storage.
- Using hydrogen to provide a significant contribution to the low-carbon heating sector will also require installation of national-

scale pipeline infrastructure for both hydrogen (e.g., to supply high-demand areas with production constraints such as London) and for CO₂ (to transport carbon away from hydrogen production towards offshore CO₂ storage sites in the Irish and North Sea).

- Reduced usage of hydrogen for heating in 2050–2060 also means that the SMR capacity installed a decade or two earlier gets utilised less. Therefore some of its capacity is used in 2050–2060 to produce hydrogen for running H₂ power generators, which are needed in the power system to ensure sufficient volumes of firm low-carbon generation and provide essential system services such as inertia and frequency regulation.

Although the main objective of the paper was to develop a novel method to soft-link two advanced, investment-optimising energy system models, and hence take advantage of their respective strengths, the application of this method on the case of decarbonising the UK's heat sector also provided several novel insights, as discussed above. Quantitative results point to the cost-effectiveness of using a mix of electricity and hydrogen technologies for delivering zero-carbon heat, also demonstrating a high level of interaction between electricity and hydrogen infrastructure in a zero-carbon system.

Clearly, the quantitative modelling outputs will be affected by the input assumptions made, in particular those regarding the cost of end-use low-carbon heating technologies. A significant volume of sensitivity analysis and further testing will therefore be required in order to provide robust and comprehensive insights into cost-efficient pathways for heat decarbonisation.

One of the key input assumptions for this analysis is the price of natural gas, which has recently seen significant increases. The cost of producing hydrogen using reformer technologies (SMR and ATR) will obviously be highly dependent on the gas price. Higher cost of hydrogen production from gas can be expected to have two main effects: 1) higher share of electricity in supplying low-carbon heat, and consequently higher capacity of electricity generation and storage, and 2) improved economics of producing hydrogen from electrolysis compared to reformers, potentially affecting the cost-efficient mix of hydrogen production for the volume that is still a part of the cost-efficient solution.

For a comprehensive assessment of combined electricity and hydrogen supply chains it would be necessary to also consider future hydrogen demand outside of residential and small commercial heating sectors, i.e., in areas such as aviation, shipping, heavy goods transport and industry. Recent projections indicate that this additional demand could reach up to 130 TWh in the UK in 2050 [12]. However, these sectors were out of scope of the analysis presented in this paper.

The additional hydrogen demand from industry and transport would also require expanding the capacity for hydrogen production and transport (including the transport of CO₂), which might also be required earlier depending on the rate of uptake of hydrogen in these sectors. Sharing the hydrogen and CO₂ infrastructure between industry, transport and heating sectors might improve the economics of hydrogen supply.

However, this is not expected to significantly change the preference for hybrid low-carbon heating solutions given the relative costs of supplying electricity and hydrogen and the assumed efficiencies of HP and boiler components, which suggest that HP components should be used to provide the bulk of heat due to low operating cost and high installation cost, while hydrogen boilers should supply peak heat demand because of higher running cost but significantly lower investment cost. Including hydrogen

demand from industry and transport sector alongside heating represents an important future extension of the research presented in this paper.

There is a number of other areas where the approach presented in this paper could be further enhanced. Future research in this area will focus on: automating the iteration process between the two models and studying their convergence in more detail; expanding the model scope to include a broader set of technologies for end-use heating and hydrogen production (such as e.g. hydrogen absorption HPs), as well as to consider DHNs; and incorporating uncertainty around key variables into the multi-model approach.

Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Table A1
Economic parameters of low-carbon and zero-carbon generation technologies

Generation	Capital cost [€/kW]	Fixed O&M Cost [€/kW/year]	Discount Rate [%]	Lifetime	Carbon Emission [kg/MWh]
Nuclear	4100	72.9	8.9	40	–
CCGT	600	13.1	7.5	25	318.8
OCGT	400	6.8	7.1	25	520.6
Gas-CCS	1300	22.3	7.3	25	31.9
H2-OCGT	400	6.8	7.1	25	–
H2-CCGT	600	13.1	7.5	25	–
Wind	1100	24.5	6.3	25	–
PV	300	6.0	6.0	25	–
Battery storage	395	–	7.0	20	–

Table A2
Annual electricity consumption [TWh]

Consumer type	1st iteration			2nd iteration		
	2030–2040	2040–2050	2050–2060	2030–2040	2040–2050	2050–2060
Non-Heat	415	415	415	415	415	415
Heat	209	199	188	69	97	185
Total	624	614	603	484	512	600

Table A3
Annual electricity production [TWh]

Producer type	1st iteration			2nd iteration		
	2030–2040	2040–2050	2050–2060	2030–2040	2040–2050	2050–2060
Battery storage *	78 - 92 = -14	80 - 98 = -18	77 - 95 = -18	29 - 34 = -5	46 - 56 = -10	74 - 91 = -17
Other RES	8	8	8	8	8	8
H2 generation	0	0	0	1	21	20
Biomass	<1	12	12	<1	<1	<1
PV	26	21	20	19	20	21
Wind	494	556	545	367	437	532
Nuclear	35	35	35	35	35	35
OCGT	3	0	0	1	0	0
Gas CCGT	70	0	0	56	0	0
Total	624	614	603	484	512	600

* The difference between annual discharged and charged energy for battery storage systems is reported here.

Acknowledgment

The research presented in this paper has been supported by the UK Engineering and Physical Sciences Research Council (EPSRC) grant number EP/R045518/1 (IDLES Programme). A shorter version of this paper has been presented during the 16th Conference on Sustainable Development of Energy, Water and Environment Systems (SDEWES) held in Dubrovnik, Croatia, October 10–15, 2021. The title of the conference paper was “Multi-model assessment of heat decarbonisation options in the UK using renewable hydrogen”.

Appendix

Input data.

Table A4

Cost assumptions for hydrogen and CO₂ pipelines of various capacities have been based on [46], and are listed below.

Technology type	CapEx [£k/km]	Maximum flow rate [kg/s]	Assumed losses [%/km]
18 inch H ₂ pipeline	870	7.1	0.005
24 inch H ₂ pipeline	126	30	
36 inch H ₂ pipeline	2020	105	
48 inch H ₂ pipeline	2790	220	
12 inch onshore CO ₂	600	88	0.002
26 inch onshore CO ₂	1300	350	
12 inch offshore CO ₂	780	88	
26 inch offshore CO ₂	1500	350	

Table A5

The capacity and capital cost for each hydrogen production technology are summarised below. The reduction in capital cost is based on projections by BEIS [34]. Except for electrolyzers, the initial CapEx for 2020–2030 are based on Sunny et al. [46]. The CapEx assumptions for electrolyzers are based on [21].

Technology type	Capacity [GW]	CapEx [£/kW]			
		2020–2030	2030–2040	2040–2050	2050–2060
SMR with syngas capture	1	320	280	239	199
SMR with fluegas capture	1	480	420	360	299
ATR with CCS	1	510	395	331	266
ATR with GHR and CCS	1	490	379	318	256
PEM electrolysis (low eff.)	0.1	496	268	205	143
PEM electrolysis (high eff.)	0.1	587	317	302	169
SOE electrolysis	0.1	971	728	486	363
Biomass gasification with CCS	0.2	1100	851	713	574

Table A6

Assumptions on investment costs (CapEx) and efficiencies of individual heating technologies are reported below based on [69]. The COP refers to an air temperature of 7 °C and 55 °C water temperature for an air-water heat pump. Hydrogen boilers are expected to meet the same efficiency standards as current natural gas boilers. The investment cost of the hybrid ASHP-H₂ system is constructed from equal shares of the investment cost of ASHP and H₂ units.

Technology type	CapEx [£/kWth]	Efficiency/COP
Hydrogen boiler	48	90%
Natural gas boiler	48	90%
ASHP	412	3.04
Hybrid ASHP-H ₂	209	3.03/90%

Table A7

Performance characteristics for hydrogen caverns and CO₂ offshore injection wells are summarised here. References underlying these input parameters can be found in Ref. [46].

Storage type	CapEx [£m/unit]	Capacity [GWh]	Maximum injectivity	Maximum deliverability
Medium pressure cavern	32	64	100	200
High pressure cavern	100	144	100	200
CO ₂ injection well	66	–	1.5 Mt/year	–

References

[1] H. Stancin, H. Mikulčić, X. Wang, N. Duić, A review on alternative fuels in future energy system, *Renew. Sustain. Energy Rev.* 128 (2020), 109927.

[2] G. Papaefthymiou, K. Dragoon, Towards 100% renewable energy systems: uncapping power system flexibility, *Energy Pol.* 92 (2016) 69–82.

[3] Department for Business, Energy and Industrial Strategy, UK Becomes First Major Economy to Pass Net Zero Emissions Law, 2019.

[4] Department for Business, Energy and Industrial Strategy, 2019 UK Greenhouse Gas Emissions, 2019.

[5] Parliamentary Office of Science and Technology, Carbon Footprint of Heat Generation, 2016.

[6] R. Lowes, B. Woodman, Disruptive and uncertain: policy makers' perceptions on UK heat decarbonisation, *Energy Pol.* 142 (2020), 111494.

[7] P.A. Østergaard, N. Duić, Y. Noorollahi, H. Mikulčić, S. Kalogirou, Sustainable development using renewable energy technology, *Renew. Energy* 146 (2020) 2430–2437.

[8] P.A. Østergaard, N. Duić, Y. Noorollahi, S. Kalogirou, Latest progress in Sustainable Development using renewable energy technology, *Renew. Energy* 162 (2020) 1554–1562.

[9] P.A. Østergaard, N. Duić, Y. Noorollahi, S. Kalogirou, Recent advances in renewable energy technology for the energy transition, *Renew. Energy* 179 (2021) 877–884.

[10] HM Government, Net Zero Strategy, Build Back Greener, 2021.

- [11] HM Government, The Ten Point Plan for a Green Industrial Revolution: Building Back Better, Supporting Green Jobs, and Accelerating Our Path to Net Zero, 2020.
- [12] National Grid ESO, Future Energy Scenarios: FES 2020 Documents, National Grid, 2020. <https://www.nationalgrideso.com/future-energy/future-energy-scenarios/fes-2020-documents>.
- [13] R. Sansom, Decarbonising Low Grade Heat for Low Carbon Future, Ph.D. thesis, Imperial College London, 2014.
- [14] J.E. Bistline, G.J. Blanford, The role of the power sector in net-zero energy systems, *Energy and Climate Change* 2 (2021), 100045.
- [15] X. Zhang, G. Strbac, F. Teng, P. Djapic, Economic assessment of alternative heat decarbonisation strategies through coordinated operation with electricity system – UK case study, *Appl. Energy* 222 (2018) 79–91.
- [16] M. Aunedi, A.M. Pantaleo, K. Kuriyan, G. Strbac, N. Shah, Modelling of national and local interactions between heat and electricity networks in low-carbon energy systems, *Appl. Energy* 276 (2020), 115522.
- [17] J.-P. Jimenez-Navarro, K. Kavvadias, F. Filippidou, M. Pavičević, S. Quoilin, Coupling the heating and power sectors: the role of centralised combined heat and power plants and district heat in a European decarbonised power system, *Appl. Energy* 270 (2020), 115134.
- [18] M. Pavičević, K. Kavvadias, T. Pukšec, S. Quoilin, Comparison of different model formulations for modelling future power systems with high shares of renewables – The Dispa-SET Balkans model, *Appl. Energy* 252 (2019), 113425.
- [19] M. Pavičević, A. Mangipinto, W. Nijs, F. Lombardi, K. Kavvadias, J.P.J. Navarro, E. Colombo, S. Quoilin, The potential of sector coupling in future European energy systems: Soft linking between the Dispa-SET and JRC-EU-TIMES models, *Appl. Energy* 267 (2020), 115100.
- [20] D.F. Dominković, I. Bačeković, B. Cosić, G. Krajačić, T. Pukšec, N. Duić, N. Markovska, Zero carbon energy system of South East Europe in 2050, *Appl. Energy* 184 (2016) 1517–1528.
- [21] G. Strbac, D. Pudjianto, R. Sansom, P. Djapic, H. Ameli, N. Shah, N. Brandon, A. Hawkes, M. Qadrdan, Tech. rep, in: *Analysis of Alternative UK Heat Decarbonisation Pathways*, Imperial College London, 2018.
- [22] J. Ramsebner, R. Haas, A. Ajanovic, M. Wietschel, The sector coupling concept: a critical review, *Wiley Interdisciplinary. Rev.: Energy Environ.* 10 (4) (2021) e396.
- [23] G. Strbac, D. Pudjianto, M. Aunedi, P. Djapic, F. Teng, X. Zhang, H. Ameli, R. Moreira, N. Brandon, Role and value of flexibility in facilitating cost-effective energy system decarbonisation, *Progress Energy* 2 (4) (2020), 042001.
- [24] D. Pudjianto, M. Aunedi, P. Djapic, G. Strbac, Whole-systems assessment of the value of energy storage in low-carbon electricity systems, *IEEE Trans. Smart Grid* 5 (2) (2013) 1098–1109.
- [25] V.Z. Gjorgievski, N. Markovska, A. Abazi, N. Duić, The potential of power-to-heat demand response to improve the flexibility of the energy system: an empirical review, *Renew. Sustain. Energy Rev.* 138 (2021), 110489.
- [26] H. Liu, J. Ma, A review of models and methods for hydrogen supply chain system planning, *CSEE J. Power Energy Syst.* (2020) 1–12.
- [27] S.J. Davis, N.S. Lewis, M. Shaner, S. Aggarwal, D. Arent, I.L. Azevedo, S.M. Benson, T. Bradley, J. Brouwer, Y.-M. Chiang, et al., Net-zero emissions energy systems, *Science* 360 (6396) (2018).
- [28] M. Aunedi, K. Wills, T. Green, G. Strbac, Tech. rep, in: *Net-zero GB Electricity: Cost-Optimal Generation and Storage Mix*, Imperial College London, 2021.
- [29] P. Fu, D. Pudjianto, X. Zhang, G. Strbac, Integration of hydrogen into multi-energy systems optimisation, *Energies* 13 (7) (2020) 1606.
- [30] A. Kovač, M. Paranos, D. Marcius, Hydrogen in Energy Transition: A Review, *International Journal of Hydrogen Energy*, 2021.
- [31] Trinomics, LBST, Opportunities for Hydrogen Energy Technologies Considering the National Energy & Climate Plans, Fuel Cells and Hydrogen 2 Joint Undertaking (FCH 2 JU), 2020.
- [32] International Renewable Energy Agency, *Green Hydrogen: A Guide to Policy Making*, 2020.
- [33] I. Staffell, D. Scamman, A.V. Abad, P. Balcombe, P.E. Dodds, P. Ekins, N. Shah, K.R. Ward, The role of hydrogen and fuel cells in the global energy system, *Energy Environ. Sci.* 12 (2) (2019) 463–491.
- [34] Department for Business, Energy and Industrial Strategy, *Hydrogen Production Costs 2021*, 2021.
- [35] K. Damen, M. van Troost, A. Faaij, W. Turkenburg, A comparison of electricity and hydrogen production systems with CO₂ capture and storage—Part B: chain analysis of promising CCS options, *Prog. Energy Combust. Sci.* 33 (6) (2007) 580–609.
- [36] A. Almansoori, N. Shah, Design and operation of a future hydrogen supply chain: snapshot model, *Chem. Eng. Res. Des.* 84 (6) (2006) 423–438.
- [37] P. Fu, D. Pudjianto, G. Strbac, Integration of power-to-gas and low-carbon road transport in Great Britain's future energy system, *IET Renew. Power Gener.* 14 (17) (2021) 3393–3400.
- [38] P. Colbataldo, G. Guandalini, S. Campanari, Modelling the integrated power and transport energy system: the role of power-to-gas and hydrogen in long-term scenarios for Italy, *Energy* 154 (2018) 592–601.
- [39] L. Welder, D.S. Ryberg, L. Kotzur, T. Grube, M. Robinius, D. Stolten, Spatio-temporal optimization of a future energy system for power-to-hydrogen applications in Germany, *Energy* 158 (2018) 1130–1149.
- [40] S. Collins, J.P. Deane, K. Poncelet, E. Panos, R.C. Pietzcker, E. Delarue, B.P.Ó. Gallachóir, Integrating short term variations of the power system into integrated energy system models: a methodological review, *Renew. Sustain. Energy Rev.* 76 (2017) 839–856.
- [41] H. Blanco, J.J.G. Vilchez, W. Nijs, C. Thiel, A. Faaij, Soft-linking of a behavioral model for transport with energy system cost optimization applied to hydrogen in EU, *Renew. Sustain. Energy Rev.* 115 (2019), 109349.
- [42] A. Krook-Riekkola, C. Berg, E.O. Ahlgren, P. Söderholm, Challenges in top-down and bottom-up soft-linking: lessons from linking a Swedish energy system model with a CGE model, *Energy* 141 (2017) 803–817.
- [43] S. Collins, J.P. Deane, B.Ó. Gallachóir, Adding value to EU energy policy analysis using a multi-model approach with an EU-28 electricity dispatch model, *Energy* 130 (2017) 433–447.
- [44] C.C. Pantelides, Unified frameworks for optimal process planning and scheduling, in: *Proceedings on the Second Conference on Foundations of Computer Aided Operations*, 1994, pp. 253–274.
- [45] S. Samsatli, N.J. Samsatli, The role of renewable hydrogen and inter-seasonal storage in decarbonising heat—comprehensive optimisation of future renewable energy value chains, *Appl. Energy* 233 (2019) 854–893.
- [46] N. Sunny, N. Mac Dowell, N. Shah, What is needed to deliver carbon-neutral heat using hydrogen and CCS?, *Energy Environ. Sci.* 13 (11) (2020) 4204–4224.
- [47] S. Samsatli, A. Ramos, M. Matchett, N.P. Brandon, N. Shah, N.J. Samsatli, Whole-systems modelling of alternatives for future domestic transport, in: *Computer Aided Chemical Engineering*, 38, Elsevier, 2016, 457–462.
- [48] S. Samsatli, I. Staffell, N.J. Samsatli, Optimal design and operation of integrated wind-hydrogen-electricity networks for decarbonising the domestic transport sector in Great Britain, *Int. J. Hydrogen Energy* 41 (1) (2016) 447–475.
- [49] J. Keirstead, N. Samsatli, N. Shah, C. Weber, The impact of CHP (combined heat and power) planning restrictions on the efficiency of urban energy systems, *Energy* 41 (1) (2012) 93–103.
- [50] J. Keirstead, C. Calderon, Capturing spatial effects, technology interactions, and uncertainty in urban energy and carbon models: Retrofitting Newcastle as a case-study, *Energy Pol.* 46 (2012) 253–267.
- [51] M. Aunedi, G. Strbac, Efficient system integration of wind generation through smart charging of electric vehicles, in: *2013 Eighth International Conference and Exhibition on Ecological Vehicles and Renewable Energies (EVER)*, IEEE, 2013, pp. 1–12.
- [52] M. Aunedi, G. Strbac, Whole-system benefits of vehicle-to-grid services from electric vehicle fleets, in: *2020 Fifteenth International Conference on Ecological Vehicles and Renewable Energies (EVER)*, IEEE, 2020, pp. 1–9.
- [53] G. Strbac, M. Aunedi, I. Konstantelos, R. Moreira, F. Teng, R. Moreno, D. Pudjianto, A. Laguna, P. Papadopoulos, Opportunities for energy storage: assessing whole-system economic benefits of energy storage in future electricity systems, *IEEE Power Energy Mag.* 15 (5) (2017) 32–41.
- [54] F. Teng, D. Pudjianto, M. Aunedi, G. Strbac, Assessment of future whole-system value of large-scale pumped storage plants in Europe, *Energies* 11 (1) (2018) 246.
- [55] S. Georgiou, M. Aunedi, G. Strbac, C.N. Markides, On the value of liquid-air and pumped-thermal electricity storage systems in low-carbon electricity systems, *Energy* 193 (2020), 116680.
- [56] S. Samsatli, N.J. Samsatli, N. Shah, BVCM: A comprehensive and flexible toolkit for whole system biomass value chain analysis and optimisation – Mathematical formulation, *Appl. Energy* 147 (2015) 131–160.
- [57] S. Pfenninger, A. Hawkes, J. Keirstead, Energy systems modeling for twenty-first century energy challenges, *Renew. Sustain. Energy Rev.* 33 (2014) 74–86.
- [58] Imperial College London, *Integrated Development of Low-Carbon Energy Systems (IDLES)*, 2021. <https://www.imperial.ac.uk/energy-futures-lab/idles>.
- [59] UCL Energy Institute, UK TIMES, 2021. <https://www.ucl.ac.uk/energy-models/models/uk-times>.
- [60] QGIS, A Free and Open Source Geographic Information System, 2021. <https://www.qgis.org/en/site/>.
- [61] FICO Xpress Optimization, 2021. <https://www.fico.com/en/products/fico-xpress-optimization>.
- [62] C.K. Gan, P. Mancarella, D. Pudjianto, G. Strbac, Statistical appraisal of economic design strategies of LV distribution networks, *Elec. Power Syst. Res.* 81 (7) (2011) 1363–1372.
- [63] A.C. Lewis, Optimising air quality co-benefits in a hydrogen economy: a case for hydrogen-specific standards for NO_x emissions, *Environ. Sci. J. Integr. Environ. Res.: Atmosphere* 1 (5) (2021) 201–207.
- [64] S. Gersen, M. van Essen, O. Teerling, Demonstration of High Performance (Low NO_x) Domestic Hydrogen Boilers, 2020.
- [65] M.-A. Millar, N.M. Burnside, Z. Yu, District heating challenges for the UK, *Energies* 12 (2) (2019) 310.
- [66] HM Government, Opportunity Areas for District Heating Networks in the UK, second National Comprehensive Assessment, 2021.
- [67] P. Manz, K. Kermeli, U. Persson, M. Neuwirth, T. Fleiter, W. Crijns-Graus, Decarbonizing district heating in EU-27 + UK: how much excess heat is available from industrial sites? *Sustainability* 13 (3) (2021) 1439.
- [68] Committee on Climate Change, The Sixth Carbon Budget: the UK's Path to Net Zero, 2020.
- [69] A.V. Olympios, M. Mersch, P. Sapin, A.M. Pantaleo, C.N. Markides, Library of Price and Performance Data of Domestic and Commercial Technologies for Low-Carbon Energy Systems, Apr 2021, <https://doi.org/10.5281/zenodo.4692649>.